


System Installation

bfs-battery-system

bfs can offer complete systems for the automatic topping-up of traction and stationary batteries with distilled water. Apart from the main product of the filling system, the filling plug, bfs can offer all necessary pertinent accessories.

Sample: 24 volt battery

Quant.	Description	Part No.	Quant.	Description	Part No.
12	bfs - plug III	A51000	2	end piece	08END6
12	float	07.....	1	connection female	09KUM1
1	T-piece	08T616	1	connection male	09KUV1
3m	hose NW6	08SCH6	1	dust cap	09STAC
24	hose clamp NW6	08KLE6	1	flow indicator	09FLI1
2m	hose NW10	08SCH1	1	filter cartridge	09FIL1
7	hose clamp NW10	08KLE1			

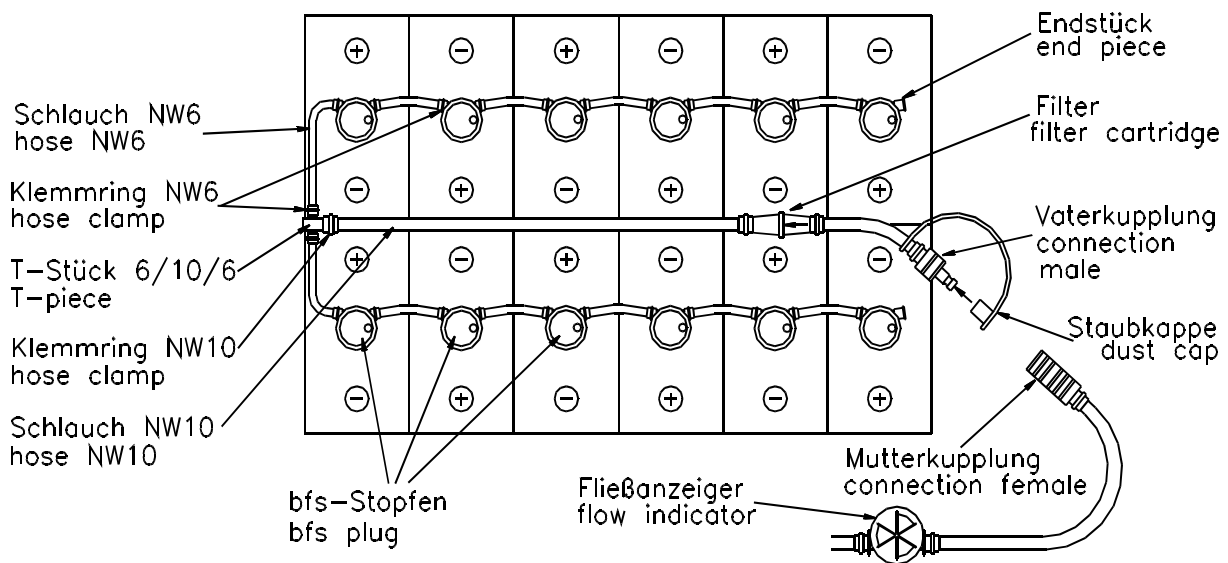

The following materials are used for the bfs-system:

Description	Material:
bfs - plug III	see technical data
float	Polypropylen (2 welded parts)
hose	PVC
hose clamp	Polyethylen
filter cartridge	Polypropylen – filter cartridge Polycarbonat – filter housing (2 welded parts)
flow indicator	Polycarbonat (total 3 parts, 2 are welded)
connectors	Polypropylen (T-piece, cross, angle, etc.)
dust cap	Polypropylen
connection male, -female	see technical data

Right or modifying of the above information reserved !